

# Hemix 9080

3-Part & 5-Part Combined Auto Hematology Analyzer

## Principles

Flow Cytometry (FCM) + Tri-angle laser scatter + Chemical staining method for WBC differentiation  
Impedance method for WBC, RBC and PLT test  
Cyanide free colorimetry for HGB test

## 5-Part parameters (CBC+DIFF)

25 reportable parameters:

WBC, Neu#, Lym#, Mon#, Eos#, Bas#, Neu%, Lym%, Mon%, Eos%, Bas%, RBC, HGB, HCT, MCV, MCH, MCHC, RDW-SD, RDW-CV, PLT, MPV, PDW, PCT, P-LCR, P-LCC

6 research parameters:

ALY#, ALY%, LIC#, LIC%, NRBC#, NRBC%

3 histograms for WBC, RBC and PLT

One 3D scattergram and three 2D scattergrams for WBC differentiation

## 3-Part parameters (CBC+3DIFF)

21 reportable parameters:

WBC, Lym#, Mid#, Gran#, Lym%, Mid%, Gran%, RBC, HGB, HCT, MCV, MCH, MCHC, RDW-CV, RDW-SD, PLT, MPV, PDW, PCT, P-LCR, P-LCC

3 histograms for WBC, RBC and PLT

## Sample volume

20μL

## Throughput

CBC+DIFF: Up to 80 tests per hour

CBC+3DIFF: Up to 90 tests per hour

## Test mode

CBC+DIFF, CBC+3DIFF

## Linearity range

WBC(CBC+3DIFF): 0.00-300.00×10<sup>9</sup>/L

WBC(CBC+DIFF): 0.00-400.00×10<sup>9</sup>/L

RBC: 0.00-8.50×10<sup>12</sup>/L

HGB: 0-250g/L

PLT: 0-3000×10<sup>9</sup>/L

HCT: 0.0-67.0%

## Repeatability

WBC≤2%(4.0-15.0×10<sup>9</sup>/L)

RBC≤1.5%(3.5-6.0×10<sup>12</sup>/L)

HGB≤1%(110-180g/L)

MCV≤1%(70-120fL)

PLT≤6.0%(100-149×10<sup>9</sup>/L)

≤4.0%(150-500×10<sup>9</sup>/L)

## Storage

Up to 100,000 records

## Communication

LAN port supports HL7 protocol

Support bi-directional LIS

## Net weight

58kg

## Power requirement

100V-240V~, 50-60Hz, ≤200VA,

## Dimension

650mm(W)×550mm(D)×610mm(H)

## Sample mode

Whole blood, capillary whole blood and pre-diluted modes

## Printout

External printer, compatible with multiply laser / inkjet printers,  
compatible with various formats and user-defined formats



*Beyond Efficiency*



# Hemix 9080

3-Part & 5-Part Combined Auto Hematology Analyzer



2/F, Nanfeng Building B, Nanshan Yungu Innovation Industrial Park, No.4093, Liuxian Blvd, Taoyuan Street, Nanshan District, Shenzhen 518055, P.R.China

+86-755-26008015

+86-755-26008015

www.dymind.com

intl@dymind.com



# Hemix 9080

## 3-Part & 5-Part Combined Auto Hematology Analyzer

### 5-Part testing mode

25 reportable parameters and 6 research parameters

3D scattergram for accurate differentiation and pathological sample flag




Greatly reduces the test cost

Only two reagents  
21 reportable parameters


### 3-Part testing mode

### Fully Automatic Intelligent Technology

- Visul self-tests (working status self test and reagent volume self-selection)
- Automatic test re-run, with re-run rules inside
- One-button error removal and automatic standby mode function
- Intelligent WBC/RBC /PLT floating threshold technology




Floating threshold



Detection aperture

### Excellent Data Management System

- A wide range of pathological alarms and up to 20 user-defined alarm ranges
- Customized templates print and help to customize the final report according to requirements
- Bi-directional LIS connection
- QC and calibration management



Customized print templates



Internal Barcode scanning




Loading up to 60 samples simultaneously and support continuous sample loading




Multiply sample modes:  
whole blood, capillary whole blood and pre-diluted modes




Closed and open vial modes,  
STAT function available

 Ultra-low sample volume especially suited to pediatric and geriatric samples

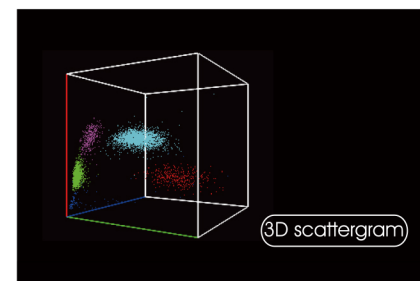

3D scattergram for accurate differentiation and pathological sample flag

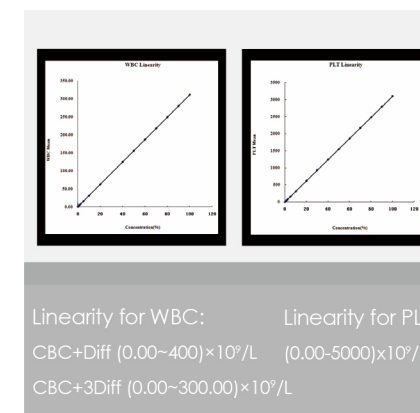

Only three lyses,  
2 years shelf life